
MOTION MONITORING IN MULTIPLE ZONES Aural and Visual Alerts at Security Station of Motion Detection By Zone



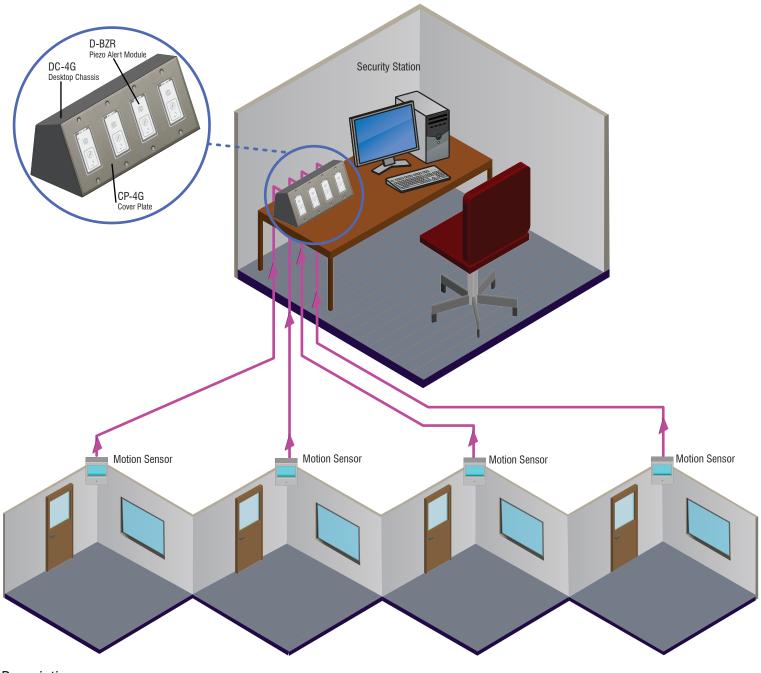

Description:

This application uses a motion sensor in each of four zones to trigger a corresponding RDL D-BZR Audio Alert Module at a security station. When triggered, the D-BZR provides a loud alert tone and visual LED indication to identify which zone actuated the alert. The D-BZR modules are mounted in a single DC-4G tabletop chassis.

During installation, the D-BZR may be set for the normal (loud) alert tone level, or for a reduced level for use in a confined area. It may also be set to alert only for the duration the motion sensor is active, or to latch continuously in the alert condition upon motion detection. When triggered in the latching mode, the D-BZR provides a continuous tone and LED indication until the front-panel reset button is pressed.



Parts List Product OTY CP-4G D-BZR

Recommended Pwr. Supplies **Product** QTY PS-24AS 24 Vdc 500 mA

Line Color Key Line Level Audio Signal Loudspeaker Level Control Signal Video Mic Level Audio Signal Ground Miscellaneous